

KF 200

UPVC/ALUMINIUM WINDOW

- Thermal insulation with standard triple glazing SOLAR+ ($U_g = 0.7 \text{ W/m}^2\text{K}$) $U_w = 0.99 \text{ W/m}^2\text{K}$
- Best thermal insulation **U_w up to $0.81 \text{ W/m}^2\text{K}$** (with corresponding glazing)
- Soundproofing up to 45 dB (with corresponding glazing)
- 71 mm construction depth
- Narrow view width up to 97 mm
- Triple gasket system
- Fully concealed hardware available upon request
- FIX-O-ROUND technology
- Visible drainage
- Resistance class WK1 and WK2 tested (upon request)
- Standard security
- 5 chamber system
- Locking parts screwed into steel – from a certain window size on
- Shortened aluminium attachment clad available upon request, for thermo-technical optimised construction connection.




I-tec Glazing



TRIPLE GASKET SYSTEM

Three continuous gasket levels without interruption ensure high impermeability.

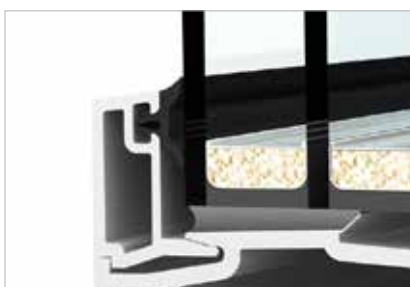

MODERN INTERIOR DESIGN

Square-edged glass bead with glazing thickness of 44 mm inside available upon request.



SQUARE-EDGED EXTERIOR DESIGN

This design in square-edged version is available exclusively with an aluminium clad.