

KF 200

UPVC & UPVC/ALUMINIUM WINDOW

- Thermal insulation with standard triple glazing
SOLAR+ ($U_g = 0.7 \text{ W/m}^2\text{K}$) $U_w = 0.99 \text{ W/m}^2\text{K}$
- Best thermal insulation **U_w up to $0.81 \text{ W/m}^2\text{K}$**
(with corresponding glazing)
- Soundproofing up to 45 dB (with corresponding glazing)
- 71 mm construction depth UPVC/aluminium or 68 mm in UPVC
- Narrow view width up to 97 mm
- Triple gasket system
- Fully concealed hardware upon request
- FIX-O-ROUND technology
- Resistance class WK1 and WK2 tested (upon request)
- 5 chamber system
- Locking parts screwed into steel – from a certain window size on
- Standard security
- Shortened aluminium attachment clad available upon request, for thermo-technical optimised construction connection.




I-tec Glazing



UPVC VERSION

Along with the aluminium attachment clad version in all colours, the classic UPVC version in white is also available.

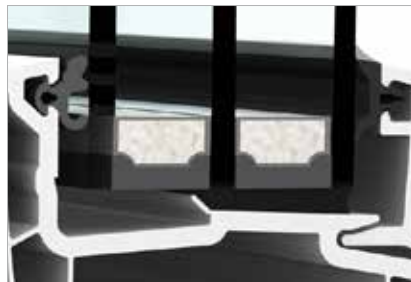

I-TEC GLAZING FIX-O-ROUND TECHNOLOGY

Continuous all around fixing of the glass pane ensures better stability, thermal and sound insulation, burglary protection and functioning security.



TRIPLE GASKET SYSTEM

Three continuous gasket levels without interruption ensure high impermeability.