


KF 410

UPVC & UPVC/ALUMINIUM WINDOW

- Thermal insulation with standard triple glazing SOLAR+ and highly thermally insulating edge seal ($U_g = 0.6 \text{ W/m}^2\text{K}$) $U_w = 0.79 \text{ W/m}^2\text{K}$
- Best thermal insulation **U_w up to $0.62 \text{ W/m}^2\text{K}$** (with corresponding glazing)
- Soundproofing up to 45 dB (with corresponding glazing)
- 90 mm construction depth
- Triple gasket system
- Fully concealed hardware
- Visible or concealed drainage
- FIX-O-ROUND technology
- Standard security
- 5 chamber system with highly thermally insulating thermal foam (HCFC, HFC and FC free)
- Shortened aluminium attachment clad available upon request, for thermo-technical optimised construction connection

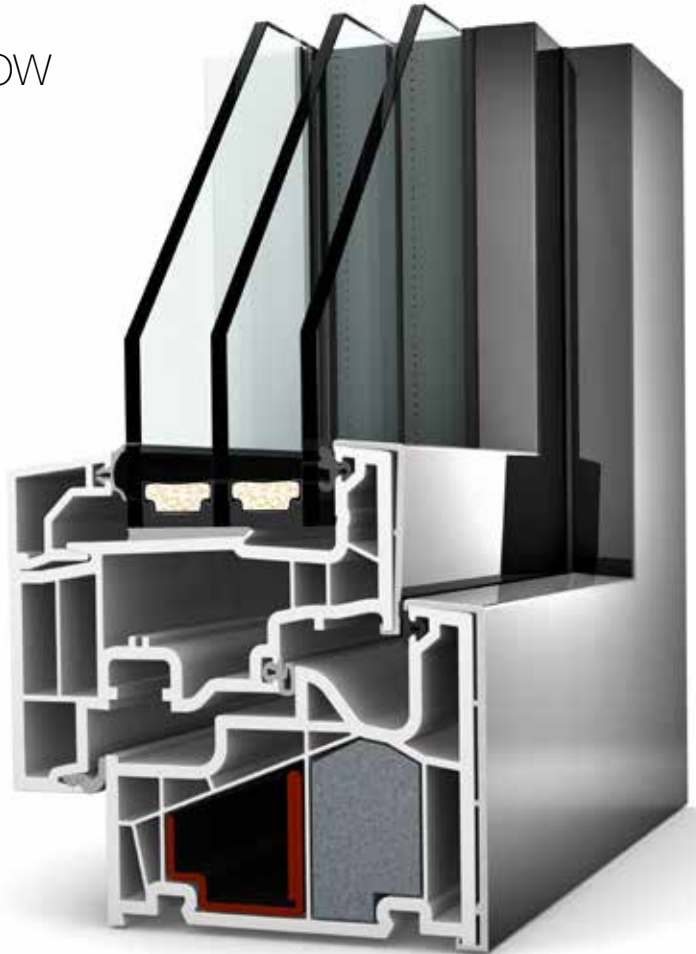

I-tec Glazing



UPVC VERSION

Along with the aluminium attachment clad version in all colours, the classic UPVC version in white is also available.



I-TEC GLAZING FIX-O-ROUND TECHNOLOGY

Continuous all around fixing of the glass pane ensures better stability, thermal and sound insulation, burglary protection and functioning security.



OUTSIDE GASKETS

In the UPVC/aluminium version you can choose between black and light grey gaskets for the outside.