

KV 340

UPVC & UPVC/ALUMINIUM COMPOSITE WINDOW

- Thermal insulation with standard triple glazing ($U_g = 0.95 \text{ W/m}^2\text{K}$) $U_w = 1.1 \text{ W/m}^2\text{K}$
- Best thermal insulation at low weight
 U_w up to $0.79 \text{ W/m}^2\text{K}$ (with 3light glazing)
- Soundproofing up to 45 dB (with corresponding glazing)
- 83 mm construction depth
- Narrow view width up to 91.5 mm
- Integrated between the panes, therefore provides privacy and sun protection
- I-tec shading available upon request
- Triple gasket system
- Fully concealed hardware
- FIX-O-ROUND technology
- Visible or concealed drainage
- 5 chamber system
- Locking parts screwed into steel – from a certain window size on
- Passive house certified version available upon request




Passive house
certified
component



I-tec Shading

I-tec Glazing

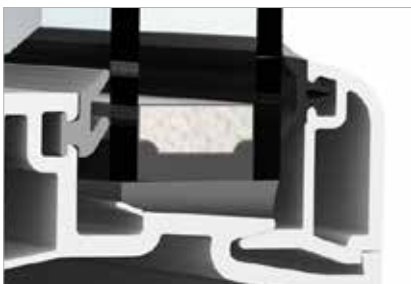

I-TEC GLAZING FIX-O-ROUND TECHNOLOGY

Continuous all around fixing of the glass pane ensures better stability, thermal and sound insulation, burglary protection and functioning security.



QUADRUPLE PROTECTION

Thermal, sound, sun and privacy protection all in one window. No additional structural provision necessary. No extra fitting necessary for sun protection systems.



I-TEC SHADING

Available upon request with photovoltaic blind, Venetian blind or Duette® with self-sufficient energy. Energy supply via integrated photovoltaic module, no extra fitting necessary, bi-directional wireless control.